

MODEL CTO-DW




*Shown with optional Cook-and Hold Feature

78 1/4"
Including vent & casters

US Patent No. 6,810,792
US Patent No. D534,755
&
Patents Pending

68"
Including drain

35 3/4"
Including handles

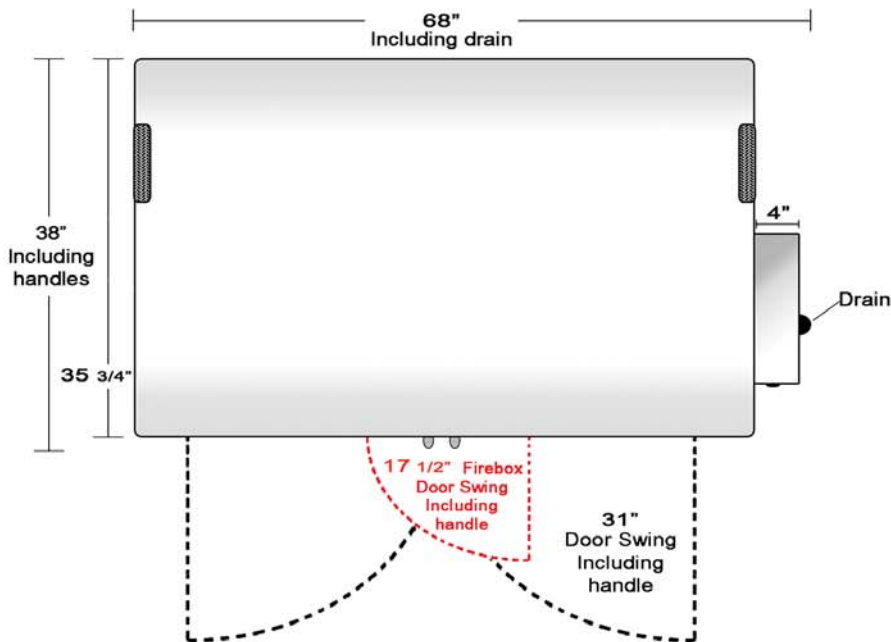

Construction: Heavy duty 12 gauge steel interior side walls (100% welded & inspected seams) tubular steel frame, 22 gauge stainless steel exterior, mineral wool insulation – rated 1200 degrees F. (contains no asbestos or fiberglass)

Electrical: 110 volts, 60 HZ, single phase, 15 amp – AVOID NON-GROUNDED EXTENSION CORDS.

Gas Burner: One (1) 65,000 BTU burner with electronic ignition. Available for LPG (Propane) or natural gas.

Firebox: Two (2) regular fireplace size logs will last for up to 6 hours of cooking with patented Convection™ circulation.

Temperature range: Thermostat control range 100 degrees F. to 325 degrees F.

Upper Limit Control Switch: Extra safety feature (set at 350 degrees F).

Dial Thermometer: 2 1/2" diameter.

Casters: Four (4) Heavy duty, ETL approved.

Convection™ System: Two (2) 1/30 HP Turbo Fan motors with 5" fan blades provide a mix of both heat and smoke for product consistency.

Exhaust: Two – 3/4" x 5 1/4" Vents.

Grease Drain: 2" Pipe with 2" Ball Valve.

Weight: 1,660 lbs, uncrated.

Sliding Racks: 4 Racks, 26" X 55 3/4", 40 Sq. Ft. total cooking surface. Nickel-chrome (stainless available at extra cost) removable for easy cleaning.

Optional Equipment: Cook and Hold and Competition Switch.

ETL LISTED



CONFORMS TO ANSI STD Z83.11; NSF STD 4
CERTIFIED TO CSA STD No. 1.8

Ole Hickory Pits ~ 1-800-223-9667 ~ (573) 334-3377 ~ www.olehickorypits.com