## MODEL CTO-DW



US Patent No. 6,810,792 US Patent No. D534,755 & Patents Pending

Sliding Racks: (4) 26" x 55 3/4" Cooking Surface: 40 Sq. Ft.



OLE HICKORY PITS<sup>TM</sup>

WOOD BURNING BARBECUE PITS



1-800-223-9667

333 North Main Street ~ Cape Girardeau, MO ~ 63701

Email: main@olehickorypits.com

www.olehickorypits.com

REV 120214

## **MODEL CTO-DW**



\*Shown with optional Cook-and Hold Feature

> US Patent No. 6,810,792 US Patent No. D534,755

> > **Patents Pending**

Construction: Heavy duty 12 gauge steel interior side walls (100% welded & inspected seams) tubular steel frame, 22 gauge stainless steel exterior, mineral wool insulation - rated 1200 degrees F. (contains no asbestos or fiberglass)

Electrical: 110 volts, 60 HZ, single phase, 15 amp - AVOID NON-GROUNDED EXTENSION CORDS.

Gas Burner: One (1) 65,000 BTU burner with electronic ignition. Available for LPG (Propane) or natural gas.

Firebox: Two (2) regular fireplace size logs will last for up to 6 hours of cooking with patented Convecture тм circulation.

Temperature range: Thermostat control range 100 degrees F. to 325 degrees F.

Upper Limit Control Switch: Extra safety feature (set at 350 degrees F).

Dial Thermometer: 2 1/2" diameter.

Casters: Four (4) Heavy duty, ETL approved.

Convecture TM System: Two (2) 1/30 HP Turbo Fan motors with 5" fan blades

provide a mix of both heat and smoke for product consistency.


Exhaust: Two - 3/4" x 5 1/4" Vents.

Grease Drain: 2" Pipe with 2" Ball Valve.

Weight: 1,660 lbs, uncrated.

Sliding Racks: 4 Racks, 26" X 55 3/4", 40 Sq. Ft. total cooking surface. Nickel-chrome (stainless available at extra cost) removable for easy cleaning.

Optional Equipment: Cook and Hold and Competition Switch.

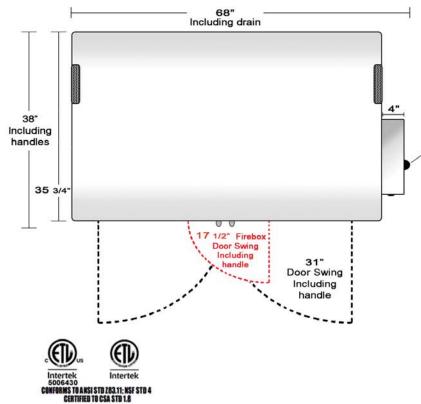

Drain