
MODEL ELES



OLE HICKORY PITSTM

WOOD BURNING BARBECUE PITS

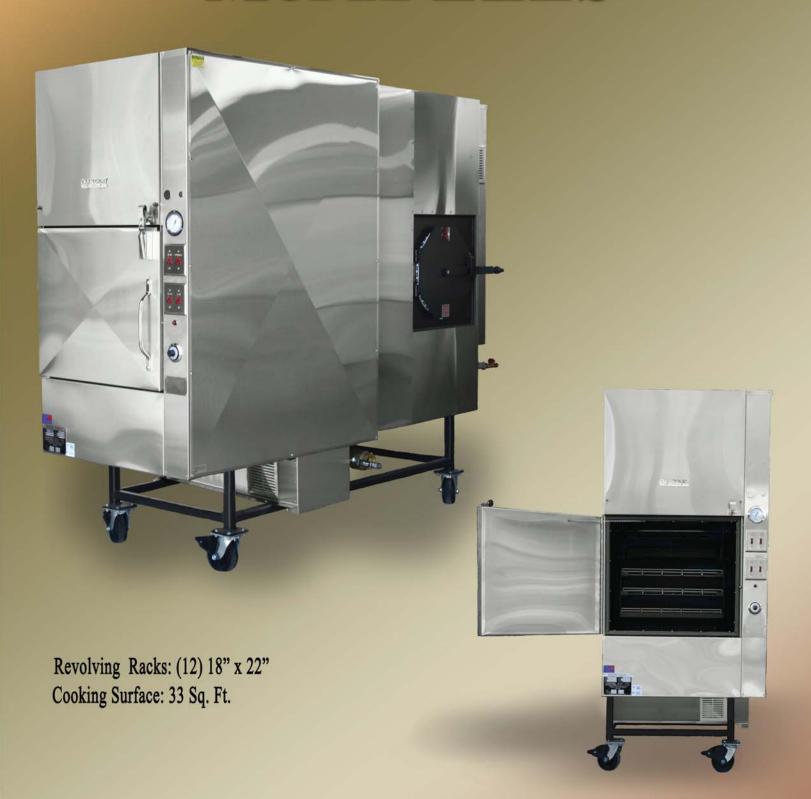

1-800-223-9667


333 North Main Street ~ Cape Girardeau, MO ~ 63701


Email: main@olehickorypits.com


www.olehickorypits.com

REV 111714

MODEL ELES

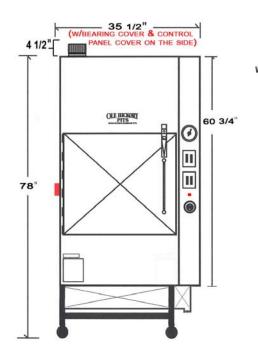

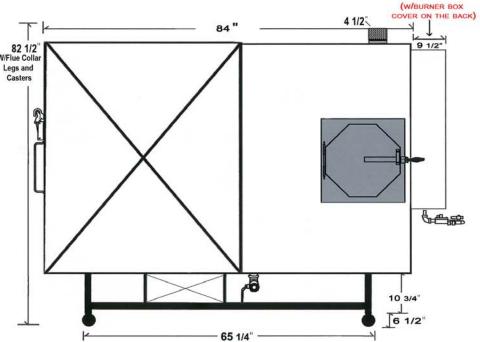

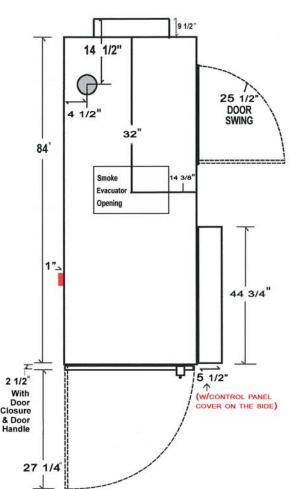

Intertek

CONFORMS TO A NSI STD 283.11; NSF STD 4

Construction: Heavy duty 12 gauge steel interior side walls (100% welded & inspected seams) tubular steel frame, 22 gauge stainless steel exterior, mineral wool insulation – rated 1200 degrees F. (contains no asbestos or fiberglass)

Electrical: 110 volts, 60 HZ, single phase, 15 amp – AVOID NON-GROUNDED EXTENSION CORDS.

Gas Burner: One (1) 65,000 BTU burner with electronic ignition. Available for LPG (Propane) or Natural Gas.

Firebox: Two (2) regular fireplace size logs will last for up to 6 hours of cooking. Air over firebox circulation.

Temperature range: Thermostat control range 100 degrees F. to 325 degrees F.

Upper Limit Control Switch: Extra safety feature (set at 350 degrees F).

Dial Thermometer: 2 1/2" diameter.

Heavy Duty Foot Switch: Rotisserie advance.

Casters: Four (4) Heavy duty, NSF approved.

Convection Fan: One (1) 1/4 HP motor with 10" fan blade provides a mix of both heat and smoke for product consistency.

Flue: 4" Diameter.

Grease Drain: 2" Pipe with 2" Ball Valve.

Weight: 1740 lbs, uncrated.

Rotisserie: 12 Racks, 18" X 22", 33 Sq. Ft. total cooking surface.

Stainless steel.

Rotisserie Drive: Heavy duty 1/4 HP motor – long lasting chain drive system utilizing gear reduction.

Optional Equipment: Cook and Hold, Evacuator, Competition Switch and other options available.